


| TRANSFORMER WEIGHT & VOLUME         |    |      |
|-------------------------------------|----|------|
| CORE AND WINDING                    | kg | 3415 |
| TANK AND FITTING                    | kg | 1125 |
| COOLING LIQUID VOLUME               | L  | 1445 |
| COOLING LIQUID WEIGHT               | kg | 1180 |
| TOTAL TX WEIGHT                     | kg | 5720 |
| ADDITIONS TO THE TRANSFORMER WEIGHT |    |      |
| SN6 / CN2                           | Kg | 250  |

| 1500kVA ELECTRICAL RATINGS          |   |   |                               |                                 |         |
|-------------------------------------|---|---|-------------------------------|---------------------------------|---------|
| No Load Voltage Ratio at Normal Tap | HV Tappings                                 | Vector Group                                      | Frequency                     | Full-Load Current at Normal Tap |         |
| 11000 / 415V                        | +7.5 to -5.0% in 2.5% INCREMENTS            | Dyn11   | 50Hz                          | HV Side                         | LV Side |
| Design Impedance at Normal Tap      | No Load Losses at rated Voltage & Frequency | Full Load Losses at rated Current & at 75°C Temp. | Temp. Rise above Ambient 40°C |                                 |         |
| 5.5%                                | 560W  | 10156W  | in Oil by Therm.              | in Wdg. by Res.                 |         |
|                                     |   |   | 60°C                          | 65°C                            |         |

| ITEM | QTY | DESCRIPTION  |
|------|-----|--|
| 15   | 2   | DETACHABLE RADIATORS with AIR-RELEASE & DRAIN PLUG (520W x 1200C x 55 x 40P)   |
| 14   | 1   | DRAIN VALVE (25NB) with MALE PLUG  |
| 13   | 4   | JACKING PADS   |
| 12   | 1   | RATING & DIAGRAM PLATE (SS)  |
| 11   | 4   | TRANSFORMER LIFTING LUGS   |
| 10   | 1   | OFF-CIRCUIT TAP SWITCH (6-Position & Padlockable)  |
| 9    | 2   | THERMOMETER POCKET (3/4" BSP MALE THREAD)  |
| 8    | 1   | OIL FILLING PIPE WITH FLANGED COVER  |
| 7    | 1   | TOP COVER with LIFTING LUGS (x2)   |
| 6    | 1   | OIL LEVEL GAUGE (with 15°) COLD OIL LEVEL MARK   |
| 5    | 1   | AIR VENT PIPE (3/4") FOR DEHYDRANT BREATHER  |
| 4    | 2   | EARTHING TERMINAL (FLAT TYPE suitable for M12 Bolt)  |
| 3    | 1   | TRANSFORMER BASE (SKID TYPE) c/w HAULAGE HOLES & BRACING   |
| 2    | 1   | LV CABLE BOX - 1.1kV, 4-POLE, AIR INSULATION, (FACING-'F', BS:2562) SUITABLE FOR 3 x 1c CABLES PER PHASE & N - MAX. 630mm.sq |
| 1    | 1   | HV SWITCH/BREAKER, 630A/200A, [Schneider : SN6/CN2] (FACING-'E' BS:2526)   |

ESSENTIAL LABELS

- ITEM 10 TAP CHANGER WARNING LABEL
- ITEM 6 COLD COOLANT LEVEL - C.O.L. 15°C
- ITEM 2 LV WARNING LABEL
- ITEM 1 HV WARNING LABEL

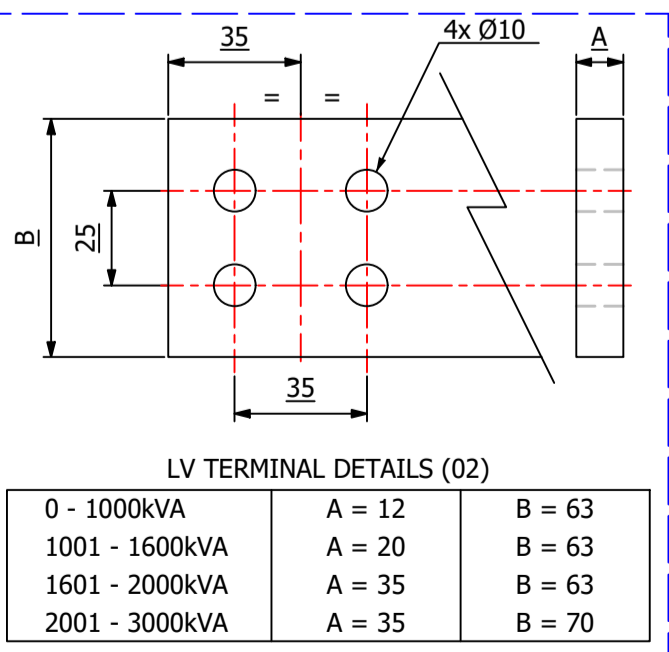

GENERAL NOTES

- ALL DIMENSIONS ARE IN 'mm'.
- ALL DIMENSIONS/WEIGHTS ARE SUBJECT TO ± 10% TOLERANCE.
- ELECTRONIC SCALE - 1:1 (ONLY WRITTEN DIMENSIONS TO BE FOLLOWED).
- TOLERANCE ON IMPEDANCE PER IEC:60076.
- PAINT SHADE.: 632 AS PER BS:381C (SEMI GLOSS) TO ISO12944 - MIN C4 SPEC.
- O/ALL DIM IS SUBJECT TO EQUIPMENT DOOR OPENING DISTANCES
- 
- 
- 

IF IN DOUBT - ASK. REMOVE ALL SHARP EDGES. DO NOT SCALE. DRAWING NOT TO SCALE

| REV | REV BY | VERIFIED | APPROVED | DESCRIPTION |
|-----|--------|----------|----------|-------------|
|     |        |          |          |             |

| REVISION DESCRIPTION | REV | PROJECT  |
|----------------------|-----|----------|
| ORIGINAL             | 00  | CUSTOMER |

| DATE        | P.O. NUMBER | W.O. NUMBER |
|-------------|-------------|-------------|
| 10-OCT-2019 |             |             |

| DRAWING TITLE  |  |
|--|--|
| GENERAL ARRANGEMENT DRAWING FOR 1500kVA WILSON e3 ECOTRANS ULTRA LOW LOSS 11000/415V, 50Hz, Dyn11, ONAN/KNAN AL WOUND DISTRIBUTION TRANSFORMER SN6 / CN2 |  |

**Wilson Power Solutions Ltd.**  
 Westland Square, Leeds,  
 West Yorkshire LS11 5SS, United Kingdom  
 Tel: +44 (0) 113 271 7588  
 Fax: +44 (0) 113 277 5124  
 web: www.wilsonpowersolutions.co.uk email: info@wilsonpowersolutions.co.uk

DRAWN BY: M.WRIGHT DATE: 09/10/2019 DRG NO: **WPS-E3-1500-AL-A002**